


Manufacturer	Righetti Ridolfi SpA
Chassis model	GTR30
Category	ROTAX MAX Challenge, 125 MAX DD2 class
Validity of approval	without limitation
Date of approval by BRP-Powertrain	(to be filled in by BRP-Powertrain)

Technical definiton of the frame	
Built according to CIK regualtions for short circuits karts	

Technical definition of the components of the chassis			
Brake system:	Designed according to CIK rules for shifter classes.		
	A brake system with a valid CIK Homologation must be used.		
Bodywork:	Designed according to CIK rules for short circuit karts.		
	A bodywork with a valid CIK Homologation must be used.		
Rear Tire Protection System:	For the participation at national or international ROTAX MAX		
	Challenge race, the BRP-Powertrain Rear Tire Protection System must be used.		

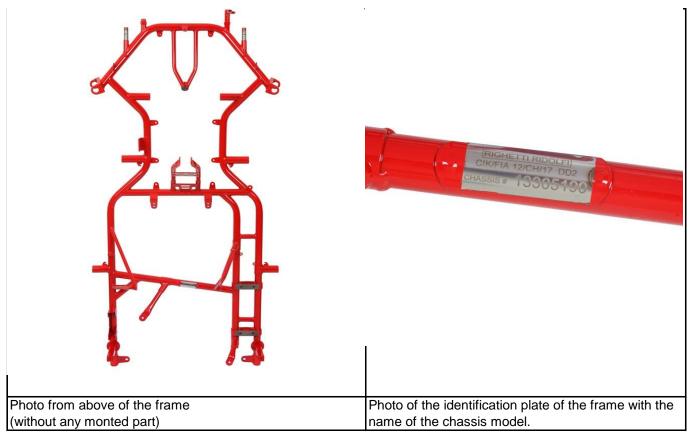

Technical description	Dimensions	Tolerance
Outer diameter of the main tubes (without painting)	30 mm	+/- 0,5 mm
Rear width of main tubes (center line to center line)	610 mm	+/- 5,0 mm
Distance of the rear two main tubes on the right side (center	92 mm	+/- 0,5 mm
line to center line)		
Wheelbase	1045 mm	+/- 5,0 mm

Technical description	Figure
Number of adjustable/removeable stabilizers at the frame	1

