

Manufacturer	Righetti Ridolfi SpA
Chassis model	VIPER
Category	ROTAX MAX Challenge, 125 MAX DD2 class
Validity of approval	without limitation
Date of approval by BRP-Powertrain	(to be filled in by BRP-Powertrain)

Technical definiton of the frame Built according to CIK regualtions for short circuits karts

Technical definition of the components of the chassis		
Brake system:	Designed according to CIK rules for shifter classes.	
	A brake system with a valid CIK Homologation must be used.	
Bodywork:	Designed according to CIK rules for short circuit karts.	
	A bodywork with a valid CIK Homologation must be used.	
Rear Tire Protection System:	For the participation at national or internatioinal ROTAX MAX	
	Challenge race, the BRP-Powertrain Rear Tire Protection System must be used.	

	CHASSIS # TOOLFI CHASSIS # TOOLFI CHASSI
Photo from above of the frame	Photo of the identification plate of the frame with the
(without any monted part)	name of the chassis model.

Technical description	Dimensions	Tolerance
Outer diameter of the main tubes (without painting)	32 mm	+/- 0,5 mm
Rear width of main tubes (center line to center line)	610 mm	+/- 5,0 mm
Distance of the rear two main tubes on the right side (center	92 mm	+/- 0,5 mm
line to center line)		
Wheelbase	1045 mm	+/- 5,0 mm

Technical description	Figure
Number of adjustable/removeable stabilizers at the frame	1



Foto of the frame with the section of the support for the fuel pump (fuel pump mounted) Foto of the frame from the side with the section of the supports for the radiator (radiator mounted)

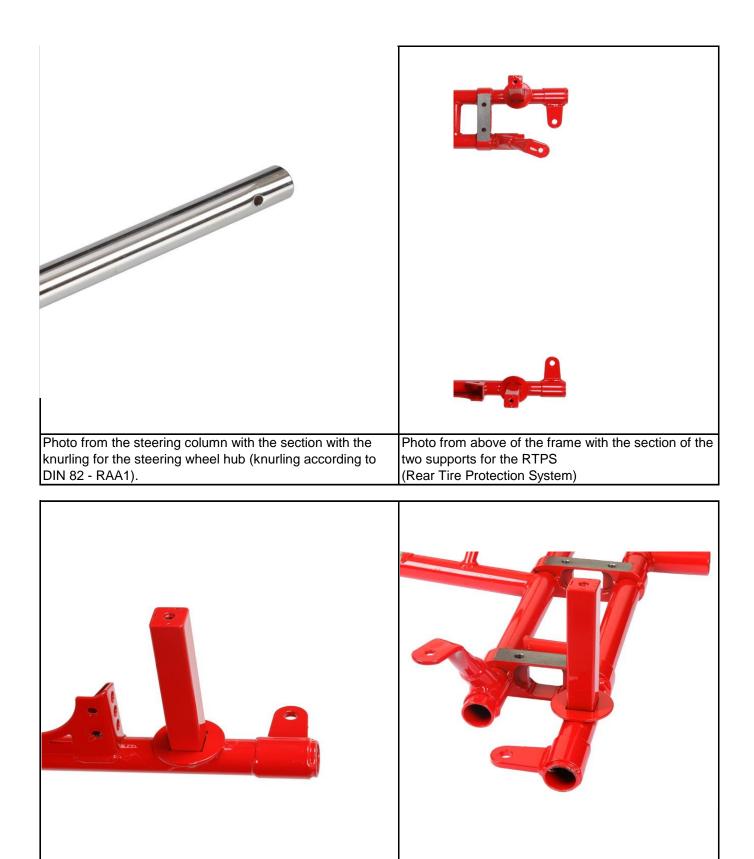


Photo of the frame from the side with the section of the
support for the RTPSPhoto of the frame from the back with the section of
the support for the RTPS
(Rear Tire Protection System)(Rear Tire Protection System)(Rear Tire Protection System)

BRP-POWERTRAIN CHASSIS APPROVAL FORM

BRP-POWERTRAIN CHASSIS APPROVAL FORM

BRP-POWERTRAIN CHASSIS APPROVAL FORM